




# TRANSFER OIL

Pure Fluid Attitude



## DVHBD - Three way one pressure needle valve

60k psi (4137 bar)

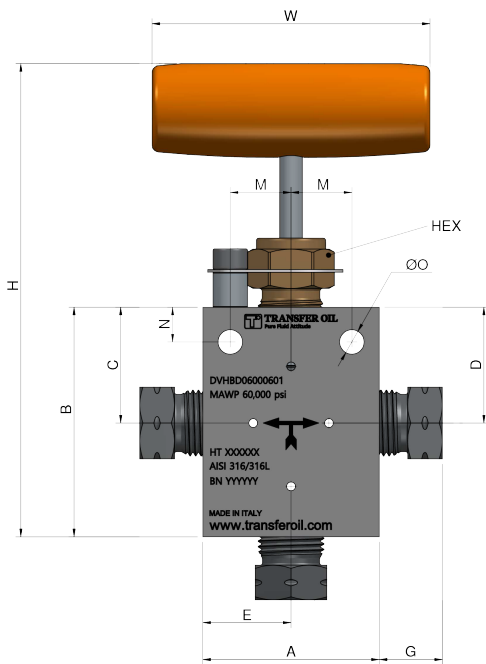

| Part no. | DN | Inches | Dash | ID (mm) | OD (mm) | WP (bar) | BP (bar) | ID (inch) | OD (inch) | WP (psi) | BP (psi) | SF | BR (mm) | BR (inch) | Weight (gr/m) | Weight (lb/ft) | Ferrule standard | Ferrule A316L |
|----------|----|--------|------|---------|---------|----------|----------|-----------|-----------|----------|----------|----|---------|-----------|---------------|----------------|------------------|---------------|
|----------|----|--------|------|---------|---------|----------|----------|-----------|-----------|----------|----------|----|---------|-----------|---------------|----------------|------------------|---------------|

Dimensions and values shown may be changed without prior notice to improve product performances and reliability.  
Transfer Oil S.p.A. assumes no liability on mistakes nor errors appearing in this spec sheet.  
Document date: 23/04/2024  
[www.transferoil.com](http://www.transferoil.com)